


- A = R 0.23
- B = R 0.3
- C = R 0.7
- D = R 0.8
- E = R 1
- G = 0.85 X 45° CHAMFER
- ±0 ACCEPT A25097 AS A LOCATION FIT.

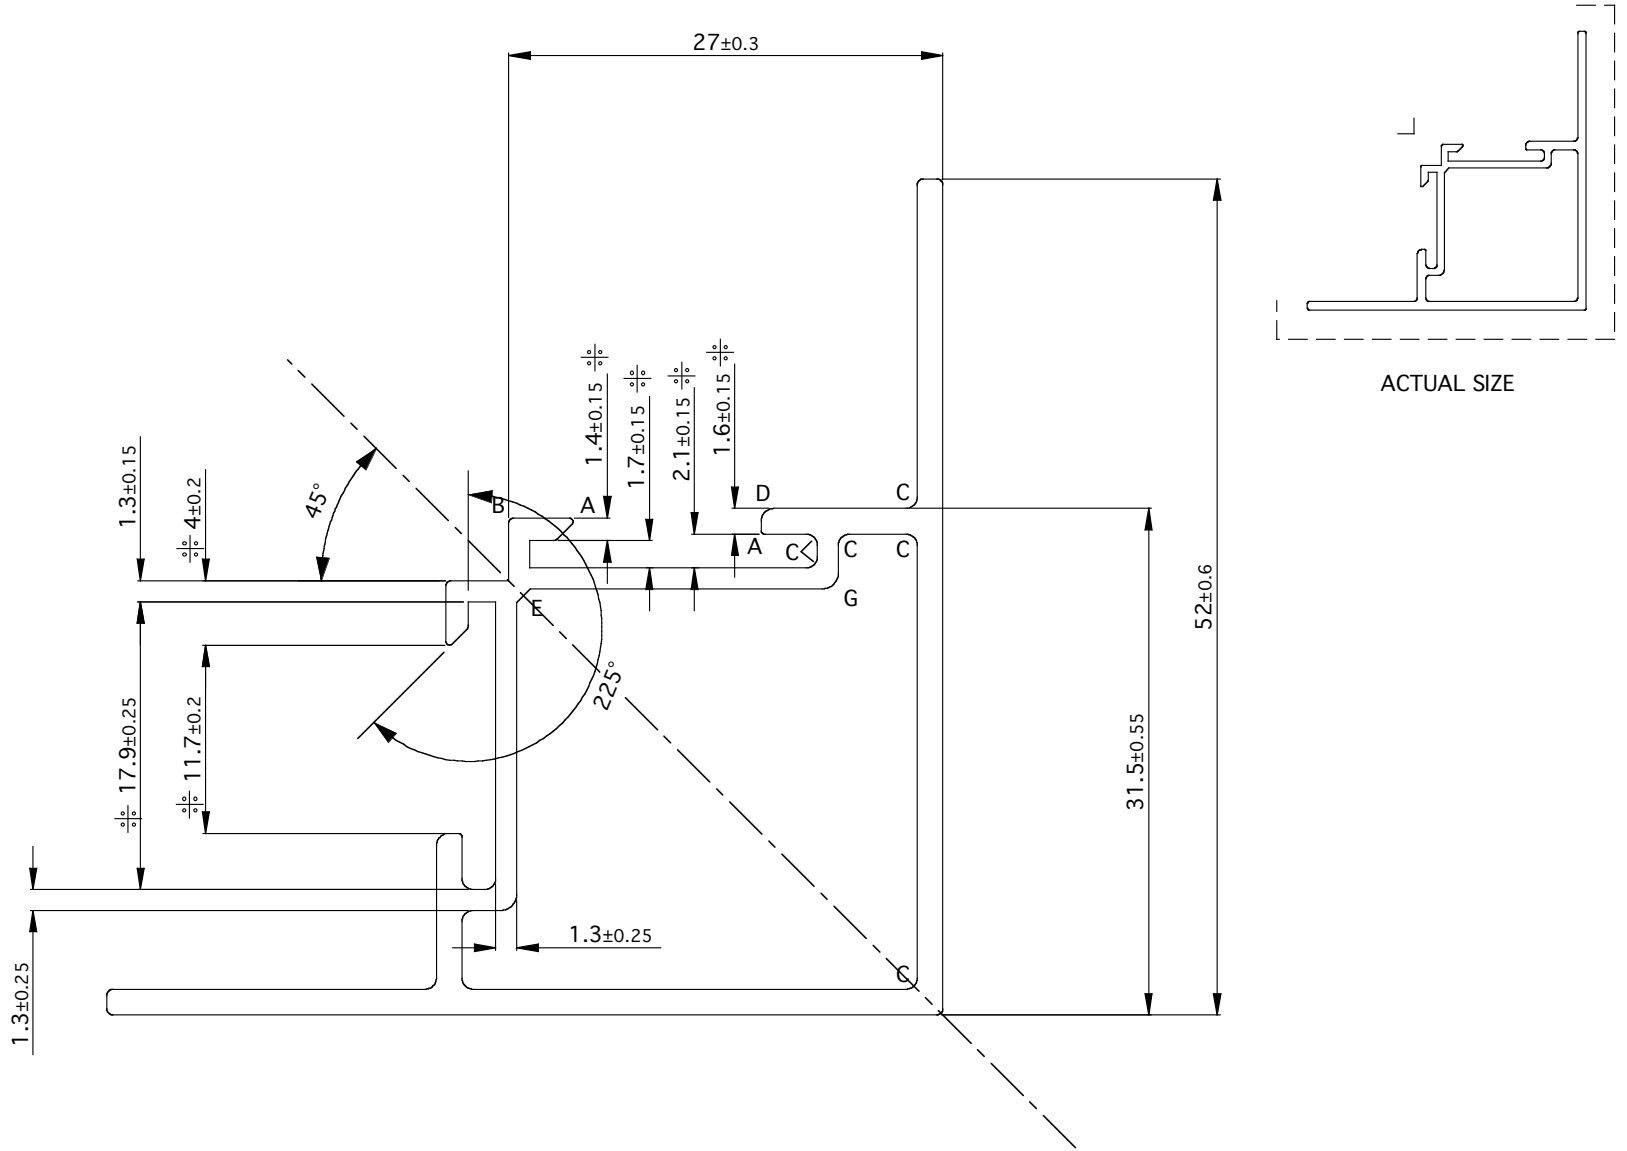

UNSPEC WALL - SOLID 1.6 ±0.15  
 HOLLOW 1.6 ±0.25

ALL DIMS APPLY TO MILL FINISH ONLY  
 ALL TOLERANCES TO ADC STANDARDS  
 UNLESS OTHERWISE STATED  
 \* NON-STD TOLS

CUSTOMER EVERLIGHT NZ LTD		CUST. PART NO. EVL04	DATE 20/11/06	SCALE FS, 3FS
END USE DANPALON INTERNAL CORNER		MATERIAL 6060 - T5	FINISH S.M.	DRN. KL
		CIRC. CIRCLE 74	CHKD.	DIE No.